


CAMELEON B

FOAM CONCENTRATE PROPORTIONING DEVICE

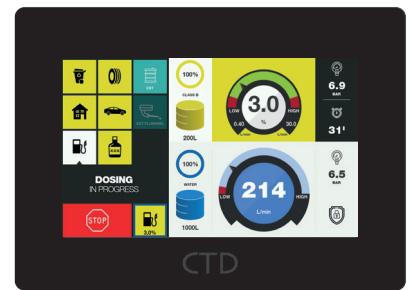

FEATURES


Van Truck

Water Pump < 3000 L/min



Class B

* by default	BP	HP	HF	HV
Pump flow range	0.4 to 30 lpm	0.6 to 24 lpm	0.6 to 36 lpm	0.6 to 30 lpm
Pump type	Piston			Gear
Suction	-0.15 bar			-0.7 bar
Pressure	12 bar	45 bar	12 bar	12 bar
Dosing range*	0.5 to 6%			
Water flow range*	2 1/2": 50 to 2000 lpm	1 1/2": 35 to 350 lpm	3": 80 to 3,000 lpm	2 1/2": 50 to 2,000 lpm
Power	elec 24V - 60A	elec 24V - 140A	elec 24V - 95A	elec 24V - 95A
Viscosity compatibility	< 120 Mpa.s ⁽¹⁾ at 20°C			< 400 Mpa.s ⁽¹⁾ at 20°C
Flushing	Automated			
Priming	Automated			

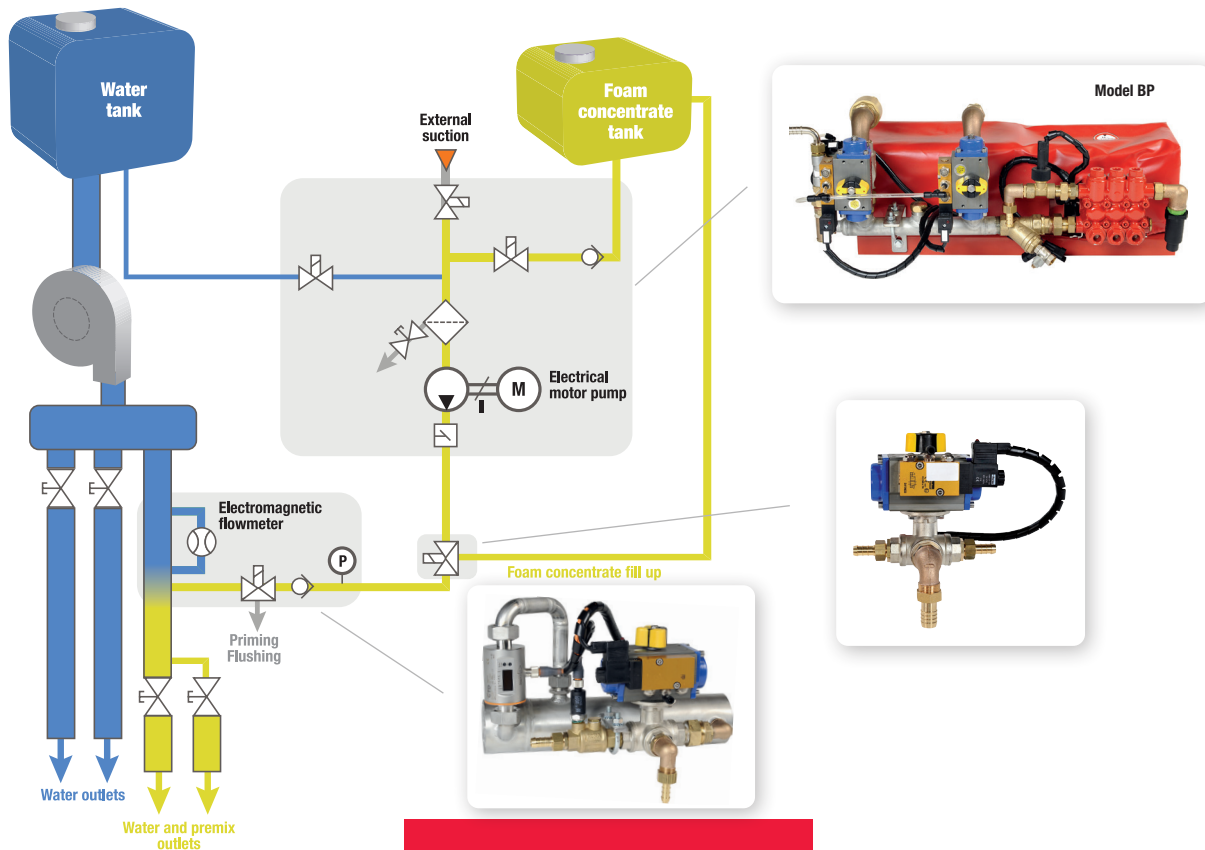⁽¹⁾ At 375 s⁻¹ shear rate following the norm EN 1568-3:2018



POSSIBLE OPTIONS

-  External suction
-  Product tank filling
-  Automatic frost protection
-  Product transfer
-  External suction hose
-  Intervention GPS tracking
-  Tank level sensor
-  Additional screen
-  Double injection LP/HP

