
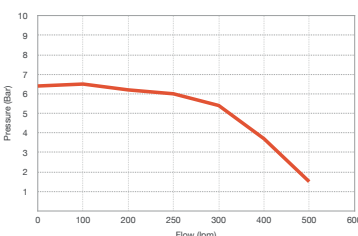
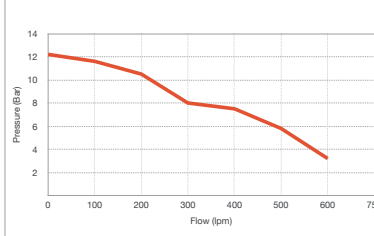


LOW PRESSURE GROUPS

FIRE EXTINGUISHING GROUP

Small
4WD
Suv

FEATURES

	BP 250E	BP 250D	BP 300E
Type of pump	Centrifugal		
Pump flow	250 lpm	250 lpm	300 lpm
Pressure	6 bar	6 bar	8 bar
Power	Thermal Petrol	Thermal Diesel	Thermal Petrol
Hose length	40m diam 1"		
Nozzle	Variable spray and flow		
Price	From 11 680 €	From 18 840 €	From 14 190 €
Performance			

REEL

Manual hose reel powered by the pump and equipped with 40 meters of semi-rigid Ø 1" hose crimped with GFR fittings.



WATER TANK

Custom-made 12 mm HDPE tank adapted to the shape of the vehicle, equipped with an anti-balan Ball Baffle system, a vent, a visual tank level and a DSP40 filling



MOTOR PUMP

Centrifugal aluminum motor pump connected to the tank or to external suction comprising 1 DSP40 outlet, 2 DN25 outlets and equipped with a pressure gauge.



NOZZLE

Nozzle cast in aluminum alloy, «cut teeth» diffusion head with variable flow and jet, opening by operating handle. 4 flow positions: 40/75/100/150 lpm at 6 bar



FRAME

Custom-made aluminum profile frame with extension for loading by forklift truck and equipped with attachment points for Pickup skips.

